

ELECTRIC SERIES SCISSOR LIFTS 1012E (3346E)

Compliant with CE/ANSI/CSA/AS/EAC standards

www.sinoboom.eu

PRODUCT HIGHLIGHTS

Efficient and Environmentally Friendly

- Higher work efficiency
- Environmental protection, zero emissions

Reduced Maintenance Costs

- The short design of sliding rail makes debris easy to clean
- Rapid, convenient transportation with two-way forklift slot
- Lower cost of ownership with highly versatile parts and components

Reliable Performance

- New wide scissor design, for a more stable working-at-height experience
- Bumper rail and indented sliding rail designed for anti-scratch



Standard Features

2WD×2WS	Maintenance-free battery	Fault diagnosis system
Non-marking tires	Proportional control	Emergency lowering system
Emergency stop	Electrophoretic painting	Tilt protection system
Flashing beacon	Forklift pockets and lifting points	Overload sensing system
Foldable guardrail	Automatic pothole protection	Manual storage box
Drivable at full height	Bumper rails	Telematics-ready connector
Horn & buzzer	AC power to platform with RCBO	

Options & Accessories

Lithium battery	AC drive motor	Platform work light
Footswitch	Secondary guarding device	

SINOBOOM™

PARTNERS IN ACCESS™




SINOBOOM.EU | INFO@SINOBOOM.EU | +31 180 225 666
Nikkelstraat 26, 2984 AM Ridderkerk, The Netherlands

ELECTRIC SERIES SCISSOR LIFTS

1012E (3346E)

Compliant with CE/ANSI/CSA/AS/EAC standards

Model	1012E (3346E)
Dimensions	
Max Working Height(Indoor/Outdoor)	12 m (32'10")
A Max Platform Height(Indoor/Outdoor)	10 m (39'4.5")
B Platform Extension	0.9 m (3')
C Length-Stowed	2.45 m (8')
D Width-Stowed	1.17 m (3'10")
E Height-stowed (Rails Folded)	1.86 m (6'1")
E Height-stowed (Rails Unfolded)	2.48 m (8'1.6")
F Wheelbase	1.88 m (6'2")
Ground Clearance(Pothole Guard Stowed)	0.1 m (4")
Ground Clearance(Pothole Guard De-ployed)	25 mm (0.98")
Platform Size (LxWxH)	2.30 m×1.15 m×1.1 m (7'6.5"×3'9"×3'7")
Performance	
Platform Capacity	320 kg (705.6 lbs)
Extension Platform Capacity	120 kg (265 lbs)
Max Occupants (Indoor/Outdoor)	2 Persons/1 Person
Drive Speed (Stowed)	0~4 km/h (0~2.5 mph)
Drive Speed (Raised)	0~0.8 km/h (0~0.5 mph)
Lift Time (Unloaded)	53s~58s
Lower Time (Unloaded)	40s~45s
Gradeability	25%
Max Allowable Inclination (front-to-back/side-to-side)	3°/1.5°
Turning Radius (Inside/Outside)	0 / 2.35 m (0 / 7'8.5")
Tire Spec/Type	φ380×125 mm/solid (φ15"×5")
Power	
Drive × Steer	2WD×2 WS
Power Source (V/kW)	24V DC , 3.3 kW
Drive Motor (V/kW)	24 V DC / 0.85 kW 24 V AC / 0.7 kW
Hydraulic Tank Capacity	15 L (3.3 gal (UK) /4.0 gal (US))
Batteries	24 V,220 Ah (Lead acid battery) 25.6 V, 200 Ah (Lithium battery)
Charger (Input/Output)	100~240 V AC/30 A
Weight	
Weight (Indoor/Outdoor)	2,815 kg (6,206lbs)
Standards Compliance	CE/ANSI/CSA/AS/EAC

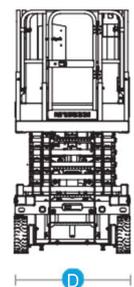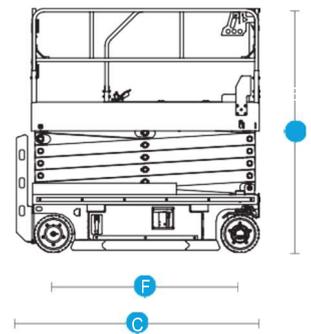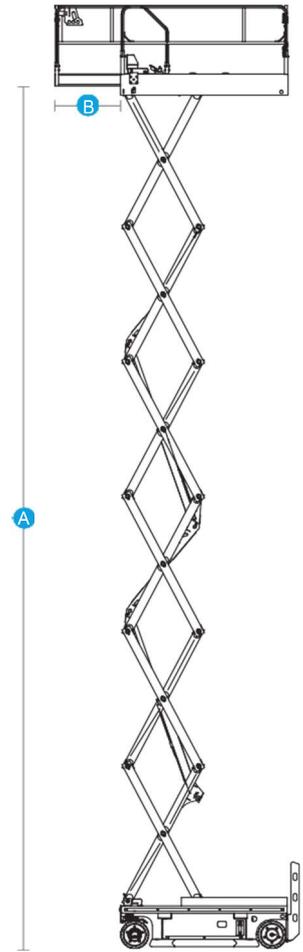

SINOBOOM™

PARTNERS IN ACCESS™

We reserve the right to make changes to specifications. The above represents the current specifications at time of publications. 05. 2023

SINOBOOM.EU | INFO@SINOBOOM.EU | +31 180 225 666
Nikkelstraat 26, 2984 AM Ridderkerk, The Netherlands